


TYPICAL RESURFACING SECTION



REB'D ① 22.0 LBS PER SY ASPH CONC 12.5MM SUPERPAVE, BLEND 1, INCL BITUM MATT & H LIME

REB'D ② BITUMINOUS PRIME COAT, AFTER FULL DEPTH RECLAIM HAS BEEN COMPLETED IF REQUIRED.

NOTE: THE WIDTH OF PAVING OF TURNOUTS FOR SIDEROADS AND DRIVES SHALL BE AS REQUIRED TO PROVIDE A SMOOTH AND WELL DRAINED TRANSITION TO AND FROM PUBLIC ROADS AND DRIVEWAYS, AS APPROVED BY THE CITY OF AUBURN, GA.

NOTE: THE CITY WILL CERTIFY ALL NECESSARY R/W, REMOVE OR ADJUST ALL UTILITIES.


THIS TYPICAL SECTION APPLIES TO PRIORITY-4(S)

NOTE: FULL DEPTH RECLAMATION WITH PORTLAND CEMENT @ 40 LBS/YD². RECYCLE IN-PLACE THE EXISTING CRUSHED STONE/ SOIL AND ASPHALT MATERIAL. RECYCLE DEPTH IS 8" BITUMINOUS PRIME COAT INCLUDED TO AID IN THE CURING PROCESS, PRIOR TO WEARING COURSE.

• DOGWOOD LANE
• PINETREE LANE
• RIVER OAKS

PROJECT L.M.I.G./NON-L.M.I.G.
COUNTY BARDOY CO., GA.
CITY AUBURN, GA.

TYPICAL RESURFACING SECTION

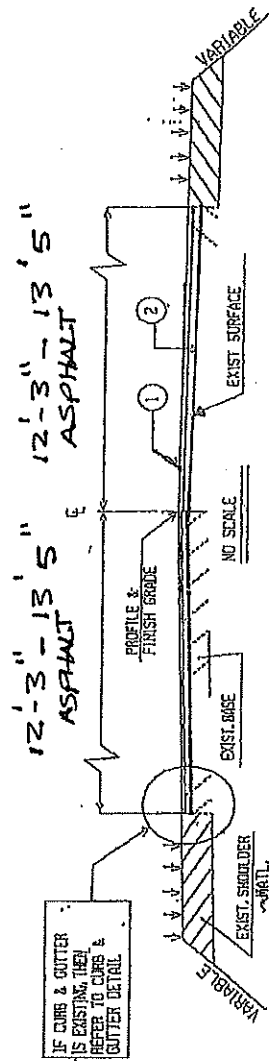

* SEE ROADWAY SUMMARY FOR PAVEMENT WIDTHS


REQ'D ① 165 LBS PER SY. ASPH CONC. 2.5MM SUPERPAVE, GROUP 2, INCL BITUM MATL & H. LIME
 REQ'D ② 110 LBS PER SY. ASPH CONC. OPEN GRADED INTERLAYER (OGI), INCL BITUM MATL & H. LIME

NOTE: THE CITY WILL CERTIFY ALL NECESSARY R/W. REMOVE OR ADJUST ALL UTILITIES.

NOTE: THE WIDTH OF PAVING OF TURNOUTS FOR SIDEROADS AND DRIVES SHALL BE AS REQUIRED TO PROVIDE A SMOOTH AND WELL DRAINED TRANSITION TO AND FROM PUBLIC ROADS AND DRIVEWAYS, AS APPROVED BY THE CITY OF AUBURN.

THIS TYPICAL SECTION APPLIES TO PRIORITY-4(S) ; SIXTH AVENUE

CURB AND GUTTER DETAIL

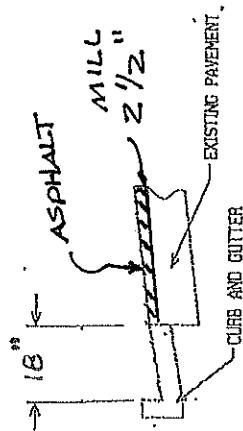

PROJECT L.M.L.G.


COUNTY BARRON CO. GA.

CITY AUBURN, GA.

REMOVE & REPLACE
CUL-DE-SAC ONLY

REMOVE & REPLACE
CUL-DE-SAC ONLY

(±) 4.0' RADIUS (+) 4.0' RADIUS
ASPHALT & ASPHALT

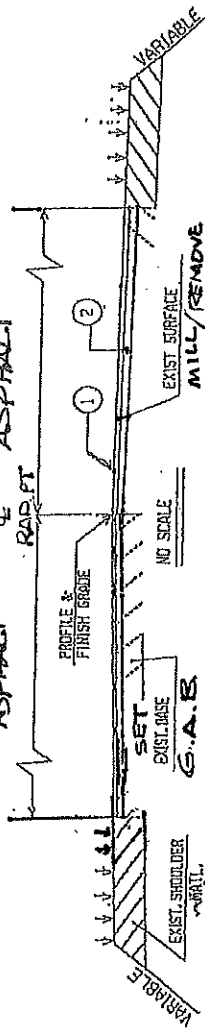

* SEE ROADWAY SURFACES FOR PAVEMENT WIDTHS

REPLACE WITH- REQ'D ① 165 LBS PER SQ. YD ASPH CONC. 2.5 IN. SUPERPAVE, BLEND 1 INCL BITUM. MATL & H. LIME

REPLACE WITH- REQ'D ② 220 LBS PER SQ. YD ASPH CONC. 1.9 IN. SUPERPAVE, GROUP 1 OR 2, INCL BITUM. MATL & H. LIME

NOTE: THE CITY WILL CERTIFY ALL NECESSARY E&W REMOVE OR ADJUST ALL UTILITIES.

NOTE: THE WIDTH OF PAVING OF TURNOUTS FOR SIDEROADS AND DRIVES SHALL BE AS REQUIRED TO PROVIDE A SMOOTH AND WELL DRAINED TRANSITION TO AND FROM PUBLIC ROADS AND DRIVEWAYS, AS APPROVED BY THE CITY OF AUBURN.

THIS TYPICAL SECTION APPLIES TO PRIORITY-4(S) : POINTERS WAY
(CUL-DE-SAC ONLY)
"REMOVE & REPLACE"

PROJECT	<u>L.M.I.S.</u>
COUNTY	<u>BARROW CO. GA</u>
CITY	<u>AUBURN, GA.</u>